
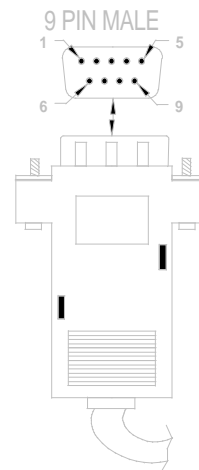


16 CONDUCTOR SHIELDED CABLE



- | | |
|----|--------------------------------|
| 1 | (RED) DATA 1 TO REG. |
| 2 | (BLUE) DATA 2 TO REG. |
| 3 | (WHITE) DATA 3 TO REG. |
| 4 | (BLACK) DATA 4 TO REG. |
| 11 | (YELLOW) CLOCK INPUT FROM REG. |
| 19 | (BROWN) ENABLE |
| 22 | (PURPLE) GROUND |
| 23 | (ORANGE) GROUND |
| 24 | (GRAY) GROUND |

- | | |
|--|---------------------------|
| | (RED) DATA 1 FROM PD1 |
| | (BLUE) DATA 2 FROM PD1 |
| | (WHITE) DATA 3 FROM PD1 |
| | (BLACK) DATA 4 FROM PD1 |
| | (YELLOW) CLOCK OUT TO PD1 |
| | (BROWN) ENABLE |
| | (PURPLE) GROUND |
| | (ORANGE) GROUND |
| | (GRAY) GROUND |

- | |
|---|
| 1 |
| 2 |
| 3 |
| 4 |
| 5 |
| 6 |
| 7 |
| 8 |
| 9 |

CAS CORPORATION (U.S.A.)

99 MURRAY HILL PARKWAY // EAST RUTHERFORD, N.J. 07073

TEL: (201) 933-9002

FAX: (201) 933-9025

INTERFACE WITH:

SANYO IF CABLE, 4 BIT PARALLEL

DRAWN BY:

JIM FLOOD (SERVICE DEPT.)

DATE:

3/12/97

REV.

A

PART #:

7880-PD0-4131 (8 FT.)
7880-PD1-4131 (16 FT.)

SHEET 1 OF 1