


# ***CL7200 Series***

## *Parameter Manual* **(English)**

Rev. 2019. 03. 01

V 3.02.7 (D)-4503

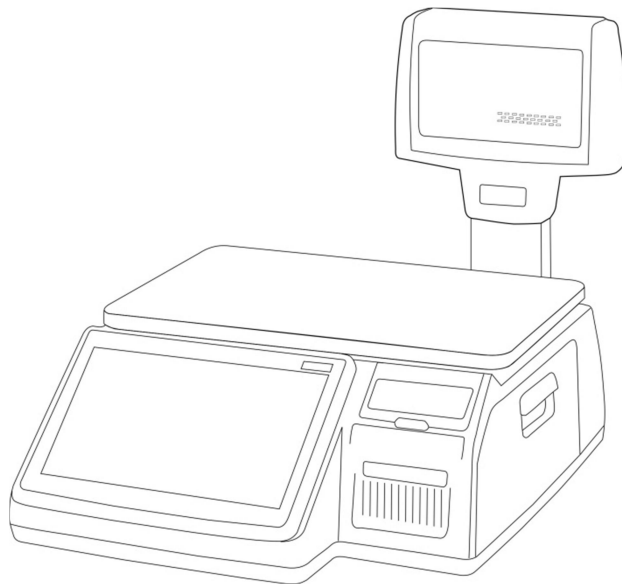

## Parameter

8600	CAL	Mode	PARAMETER SETTING (1/1) Function Code : [501] Ride Second Position
------	-----	------	--

The Parameter Setting Menu allows you to input Function Codes to change the CL7200's predefined settings. These settings determine how the scale operates and should only be changed if you are certain about the effect they will have on scale operations. In some cases these settings should not be changed without first checking with the local government agency.

There are two levels of Parameter Settings, Factory and Dealer. The Factory Settings are numbered 800 ~ 899 and can only be accessed through the Calibration Mode. The Dealer Settings are numbered 500 ~ 799 and can be accessed either through the Calibration Mode or by pressing the ZERO key while in the main Programming Menu and entering the System Password.

### 1 Factory Setting (Parameters 800~999)

#### 1. Parameter 801 ~ 809 are UNDEFINED PARAMETERS

#### 2. Parameter 810

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Price Decimal Point	0~10	Define price position of decimal point		2

#### 3. Parameter 811 ~ 830 are UNDEFINED PARAMETERS

#### 4. Parameter 831

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Select Initial Screen	0~3	Select Initial start message on display	0: Chess 1: Check List 2 : Version 3: Logo	0

--

5. Parameter 832

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use Serial Out	Y/N	Transmit initial start by serial port.	Yes= USE No= NO USE	N

6. Parameter 833

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use last using time	Y/N	Display last usage time.	Yes = USE No = NO USE	N

7. Parameter 834

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use Clerk password	Y/N	During Initial start use Clerk password	Yes = USE No = NO USE	N

8. Parameter 835

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Select Oper Mode	Y/N			N

9. Parameter 836 ~ 860 are UNDEFINED PARAMETERS

10. Parameter 861

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Prepack Print threshold(d)	10~ 30,000	Auto-detect weight difference in range		20

11. Parameter 862

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
MIN Weight for sale(d)	10~999	Set minimum range of sales weight		20

12. Parameter 863

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Display Dummy Digit(Weight)	Y/N			N

13. Parameter 864 is an UNDEFINED PARAMETER

--

**14. Parameter 865**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Triangle Type	0~2			1

**15. Parameter 866**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Decimal Sign	CHAR	Set decimal point on weight	USE "CHAR" to input ASCII	" . "

**16. Parameter 867 ~ 884 are UNDEFINED PARAMETERS**

**17. Parameter 885**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
[00] Key Format	1~4	Set "00_"key input format *(1 means 1*10 <sup>n</sup> )	1 = 10 2 = 100 3 = 1000 4 = 10000	2

**18. Parameter 886**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
ErrorMsg Clear Timeout	0~99	Set Error message display time	Display time = Input# X 0.1 sec	30

**19. Parameter 887**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Auto Call Keycode	0~999	Set Auto Call Keycode (for sale mode)	Reference Para 586 for set time	70

**20. Parameter 888**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Key Clear Time(0.1s)	1~99	Set key clear time	Set Value = Input# x 0.1 Sec	30

**21. Parameter 889 ~ 899 are UNDEFINED PARAMETERS**

--

**22. Parameter 900**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Ethernet (TCP/IP)	Y/N	Ethernet usage	Yes = USE No = NO USE	Y

**23. Parameter 901 ~ 919 are UNDEFINED PARAMETERS**

**24. Parameter 920~921**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
920 -> Sign AM	CHAR	Set AM correspond name	Able to CHAR key	AM
921 -> Sign PM	CHAR	Set PM correspond name	Able to CHAR key	PM

**25. Parameter 922 ~ 933**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
922 -> Month 1	CHAR	Set correspond month name	Able to CHAR key	JAN
923 -> Month 2				FEB
924 -> Month 3				MAR
925 -> Month 4				APR
926 -> Month 5				MAY
927 -> Month 6				JUN
928 -> Month 7				JUL
929 -> Month 8				AUG
930 -> Month 9				SEP
931 -> Month 10				OCT
932 -> Month 11				NOV
933 -> Month 12				DEC

**26. Parameter 934 ~ 940**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
934 -> Week 1	CHAR	Set correspond DAY of Week name	Able to CHAR key	SUN
935 -> Week 2				MON
936 -> Week 3				TUE
937 -> Week 4				WED
938 -> Week 5				THU
939 -> Week 6				FRI
940 -> Week 7				SAT

--

27. Parameter 941 ~ 979 are UNDEFINED PARAMETERS

28. Parameter 980

MESSAGE	VALUE	CONTENT	REMARK
Use Korean for USA	Y/N	Use Korean Language	N

29. Parameter 981 ~ 993 are UNDEFINED PARAMETERS

30. Parameter 994

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Allow FWUPDATE	0/1	F/W Update Condition	0 = No Check CAL 1 = Check CAL	1

31. Parameter 995 is an UNDEFINED PARAMETER

32. Parameter 996

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Allow FWUPDATE	0/1	F/W Update Condition	0 = No Check CAL 1 = Check CAL	1

33. Parameter 997 - 998 are UNDEFINED PARAMETERS

34. Parameter 999

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Country Code	0~9	Country Setting	0 = UN 1 = KR 2 = US 3 = EU 5 = RUS 6 = ETC	2

## 2 Dealer Setting (Parameters 500~799)

### 1. Parameter 501

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Ride Second Position	Y/N	If FOR key is not exist on key pad You can set initial reference (R1,R2,R3) (Count, PCS, Price)	KOREA USE	N

### 2. Parameter 502

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
System Password	Char	Input System Password NOTE: Use 4byte memory	Can Not Change	000419

### 3. Parameters 503 ~ 509 are UNDEFINED

### 4. Parameter 510

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Calibration Noti-Msg:	Char	Calibration Message (Korea)		CONTACT SERVICE

### 5. Parameters 511 ~ 528 are UNDEFINED

### 6. Parameter 529

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Barcode Date Type:	?	????		0

### 7. Parameter 530

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Date Format	Numeric	Set current date format 0 : YY/MM/DD 1 : MM/DD/YY 2 : MM/YYYY 3 : DD/MM/YY	YY : Year MM : Month DD : Day	1

8. Parameter 531

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Time Format	Numeric	Set current time format 0 : HH:MM (24hours) 1 : HH:MM AM (12hours) 2 : HH:MM:SS (24hours) 3 : HH:MM:SS AM (12hours)	HH : Hour MM : Minute SS : Second	0

9. Parameter 532

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Sell by date Format	Numeric	0: Calculate expire date with current date and input date 1: Input all date information (yy/mm/dd) (Input date less then 4 digit, scale will recognize as month and date (mm/dd))		0

10. Parameter 533

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use 1kg,100g Key	Y/N	Use 1kg, 100g Key. This parameter is valid only in kg mode		N

11. Parameter 534

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Default Unit Weight (1kg,100g)	Numeric	Set default unit of PLU. All weight/price calculate according to following: 1 : 1kg 2 : 100g		1

12. Parameter 535

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Display Message Time(0.1s)	Numeric	Set display time for Error, Warning message.		12



13. Parameter 536

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use kg/lb key	Y/N	Use kg/lb key		N

14. Parameter 537

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use kg/lb Auto Conversion	Y/N	Use kg/lb Auto Conversion		N

15. Parameter 538

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use 1/2lb,1/4lb Key	Y/N	Use 1/2lb, 1/4lb Key. This parameter is valid only in lb mode		N

16. Parameter 539

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Total Price BarcodeType	Y/N			N

17. Parameter 540

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Barcode Price Cut	Numeric 0 ~ 3	Set barcode last digit (price) to be dropped	When input = 1 \$12.34 -> 123	0

18. Parameter 541

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Barcode Weight Cut	Numeric 0 ~ 3	Set barcode last digit(weight) to be dropped	When input = 1 1.234kg -> 123	0

19. Parameter 542

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Barcode Item Code Cut Over	Y/N	Set barcode last digit (Item Code) to drop 1 digit	When input = Y 12345 -> 1234	N

--

**20. Parameter 543**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Weight Barcode Print Setting	Numeric 0~3	0: Weight Barcode to Weight print 1: IF PLUtype == Count then Weight Barcode to quantity print 2 :IF Fixed sale(or (-)sale) then Weight Barcode to "1"print 3: USE both 1 and 2	ONLY KOREA : 3	0

**21. Parameter 544**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Print Weight Cut	Y/N			0

**22. Parameter 545**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Display Error Message bigger	Y/N			Y

**23. Parameter 546**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use Frequent Shopper Program	Y/N			Y

**24. Parameter 547**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Time Print Format (0~2)	Numeric (0~2)	0: 13:00 1: Single Letter (12AM =A, 1AM =B) 2: Hour Only		0

25. Parameter 548

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use 2 Column for Serving Date	Numeric		Must be 9 to use true type fonts for Nutrition	9

26. Parameter 549

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Display Weight Cut	Numeric			0

27. Parameter 550

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Out of paper threshold	Numeric	Set roll paper sensor sensitivity. If sensor doesn't recognize roll paper, setting value should be lowered		200

28. Parameter 551

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use double print (auto)	Y/N	Set "Y" to double print (scale will print same label twice but counts as one transaction) You must press print key to function		0

29. Parameter 552

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Print Preset Tare Symbol	Y/N	Print Preset Tare Symbol on Label		N

30. Parameter 553

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Print Net Weight Symbol	Y/N	Print Net Weight Symbol on Label		N

--

**31. Parameter 554**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Prevent Sale of Same Weight	Y/N			N

**32. Parameter 555**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Packed Time (dep.Sell by time)	Y/N	Print packed time, according to existing sell by time		N

**33. Parameter 556**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use PS2 port for Scanner	Y/N			N

**34. Parameter 557**

MESSAGE	VALUE	REMARK	DEFAULT
Scanner Working Mode	Numeric (0~7)	0 = Scanning Calls PLU 1 = Weight from Weighing, Calculate Price then Issue Label 2 = Weight from Barcode, Calculate Price then Issue Label.	0

**35. Parameter 558**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Scanner Mapping Format	Y/N			Y

**36. Parameter 559**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Price Checksum Type	Numeric			0

**37. Parameter 560**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use Special Price for D.C.	Y/N			N

--

38. Parameter 561 is NO CAPTION

39. Parameter 562

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Cashdraw close time	Numeric	Set duration of cashdrawer opening and closing	1 = 0.1ms	1

40. Parameter 563

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Allow Reverse Feed:	Y/N	Use reverse feed function, when using continuous label mode		Y

41. Parameter 564 is an UNDEFINED PARAMETER

42. Parameter 565

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Print Training Msg	Y/N	Print Training Message on label		Y

43. Parameter 566

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Check Connection of Master R – I	Y/N			N

44. Parameter 567

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Set Print PLU Type Code	Numeric			0

45. Parameter 568

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Display Total Info	Numeric			0

46. Parameter 569

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
PLU Type Code (Barcode)	Numeric			2110

--

**47. Parameter 570**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Non Weight sale (WT.on Tray)	Y/N	Allow transaction for pcs/PLU while weight on the tray. (the weight doesn't affect price)		N

**48. Parameter 571**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Print Weight (by count sale)	Y/N	Allow to print weight while PLU is By count type (Weight value doesn't effect on price) *Weight is only for reference		Y

**49. Parameter 572**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Apply U.Price for T.D/C	Y/N	Allow to display discounted unit-price for total price		N

**50. Parameter 573**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Allow Unit Price Change	Y/N	Allow changing unit price		N

**51. Parameter 574**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Allow Print Zero T.Price	Y/N	Allow printing when total price is zero		N

**52. Parameter 575**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Barcode 'E' to PTYPE(Korea)	Y/N	Barcode 'E' to PTYPE(Korea)		N

--

**53. Parameter 576**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Fixed Price Hide	Y/N	Fixed Price Hide		N

**54. Parameter 577**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Common Barcode	Y/N	Use Common Barcode		N

**55. Parameter 578**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Common Label	Y/N	Use Common Label		N

**56. Parameter 579**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use Temp Key [TYPE]	Y/N	Use Temp Key [TYPE]		N

**57. Parameter 580 is an UNDEFINED PARAMETER**

**58. Parameter 581**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Print only WT.(u.p.zero)	Y/N	Allow to print with weight value even if Unit price is 0 (Use for only product weight transaction, not on price)		N

**59. Parameter 582**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use X key (by WT.)	Y/N	Allow to use X key on by weight type (For By-count and pcs X key is allowed)		N

--

**60. Parameter 583**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Allow continuous sale	Y/N	Allow to use add-up transaction Add-up the product/ continually (after transaction scale will set zero)		N

**61. Parameter 584**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use TARE Table No;	Y/N	Set input method Tare ID or direct input. If you set Y, must set tare weight before sale		N

**62. Parameter 585**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use U.Price for key discount	Y/N	Set discount key for (-,%) individual item or total price		Y

**Parameter 586**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Indirect PLU Call (0.1s)	Numeric	Set duration time for Indirect PLU call-up. NOTE: Input 0 will not call-up any PLU In this case you must press PLU button to call-up a PLU	1 = 0.1s 10 = 1sec	0

**63. Parameter 587**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Override only u.p.zero PLU	Y/N	Set auto override when unit price is 0. You must input unit price to print	IF parameter 588 is set Y override value is saved	Y



--

**64. Parameter 588**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Save Overriden u.p. zero PLU	Y/N	If para 587 set as 0, save the unit price to PLU. Next time PLU is called up PLU has saved unit price.		N

**65. Parameter 589**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Apply Price Round	0~4	0: No use 1: For each PLU 2: Addup Round (ticket only) 3: Addup Round (label and ticket) 4: Cutting		0

**66. Parameter 590**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Round Type	Y/N	N : Round down, Total Price Y : Round off, Total Price Default value : Set value in parameter 591		Y

**67. Parameter 591**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Price Round Unit	Numeric	Set round value of last digit of total price (set value: 0, 5, 10, 100, 1000 etc) This value set correspond with para 590 (Round off/down)	Set value=100 para 590 set as 1 ex 1) Total Price=12345 Set value applied Total Price=12300 ex 2) Total Price=12355 Set value applied Total Price=12400	0

--

**68. Parameter 592**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Weight Round Unit	Y/N	Currently not used Weight round off/down in 10 unit Calculate and print at same time		0

**69. Parameter 593**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use By Pcs PLU	Y/N	Set by pcs PLU Y for count/quantity N for simple count function		Y

**70. Parameter 594**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Print under Min. Weight	Y/N	Allow to print under minium weight		N

**71. Parameter 595**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Individual Reset(Z Report)	Y/N	Y : Set to erase each report on Z report. NOTE: May cause effect on other reports N: Set to erase all the report at once Except X1/X2 is separate item	X Report : only call-up record and print Z Report : allow to call-up and erase record for final- report	N

**72. Parameter 596**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
X/Z Report	Y/N	Set to make a report NOTE: N makes no transaction therefore return key does not function		Y

--

**73. Parameter 597**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Prepack Report	Y/N	Set to make a report on Prepack mode	Set para 596 as N. This set will not make report	Y

**74. Parameter 598**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Print when Z report clear	Y/N	Set to print on Z report clear	Set as N X report only prints Z report erase only	Y

**75. Parameter 599 is an UNDEFINED PARAMETER**

**76. Parameter 600**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Auto clear key tare	Y/N	Set undo key-tare value after sale (when PLU is clear)		Y

**77. Parameter 601**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Auto clear weight tare	Y/N	Set undo weight-tare value after sale		Y

**78. Parameter 602**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use Canadian tare	Y/N	Set to keep tare value if PLU has own tare value (for reset tare value, must reset scale)		N

--

**79. Parameter 603**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Apply PLU Tare Preferentialy	Y/N	Set to change weight tare value after call-up the PLU (Must greater then call-up PLU tare)		N

**80. Parameter 604**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Keep key tare (PLU tare)	Y/N	Allow to over-ride last called-up PLU value. Last key tare value is over-ride by PLU key tare. After transaction PLU tare is clear and manually entered tare value remains	Y= PLU preset tare overrides manual tare. N= Doesn't allow PLU with preset tare to be recalled.	N

**81. Parameter 605**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Accumulation tare	Y/N	Set to use accumulation tare NOTE: tare value has to be greater than last one		N

**82. Parameter 606**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Subtraction tare	Y/N	Set to use subtraction tare Only set tare value less than last tare value		N

83. Parameter 607

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Tare Input Type	0~4	Check input tare	When invalid value 0: Error 1: No Round 2: Round Off 3: Round Down 4: Round Up	0

84. Parameter 608

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Tare after PLU call	Y/N	Set tare value after PLU is selected		Y

85. Parameter 609

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Display tare only weight type	Y/N	Set to display main tare only PLU is weight type	Apply on EU display mode	N

86. Parameter 610

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Ignore Wt. at Fixed Item	Y/N	Ignore weight when called fixed Item		Y

87. Parameter 611

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Display weight tare on PT	Y/N	Display weight tare on PT		Y

88. Parameter 612

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use Neg . Weight Limit	Y/N			N

--

**89. Parameter 613**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Transaction Msg Size	Y/N			N

**90. Parameter 614**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Clerk Lock Key Method	Numeric			0

**91. Parameter 615**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use By Count PLU	Y/N			Y

**92. Parameter 616**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Hold Time	Numeric		x 0.1 sec	0

**93. Parameter 617**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Clerk Subtotal List	Y/N			N

**94. Parameter 618**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Unlimited Fixed Weight	Y/N			N

**95. Parameter 619**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use RS-232 for Real Time Transactions	Y/N			N

**96. Parameter 620**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Send Real Time Transactions	Y/N			0

--

**97. Parameter 621**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use NMI Discount	Y/N	Title now says "Discount Type"		N

**98. Parameter 622**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Send Weight Value <1	Numeric		1 = x10 2 = x100	0

**99. Parameter 623**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use PS2 Keyboard for CL-5000 "S" type	Y/N			N

**100. Parameter 624 is an UNDEFINED PARAMETER**

**101. Parameter 625**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
EXT NVRAM Type	Y/N			0

**102. Parameter 626**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Display Primary sign	String	Set money sign for display		\$

**103. Parameter 627 is an UNDEFINED PARAMETER**

**104. Parameter 628**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Weight LB Symbol 1	String	Set use weight unit/symbol for lb (CAUTION: do not change)	CAUTION: DO NOT CHANGE	lb

--

105. Parameter 629

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Weight LB Symbol 2	String	Set use sub weight unit/symbol for lb (do not change)	CAUTION: DO NOT CHANGE	oz

106. Parameter 630

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Weight symbol 1	string	Set use weight unit/symbol (CAUTION: do not change)	CAUTION: DO NOT CHANGE	kg

107. Parameter 631

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Weight symbol 2	String	Set use sub weight unit/symbol (do not change)	CAUTION: DO NOT CHANGE	g

108. Parameter 632

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Primary sign	String	Set primary money sign		\$

109. Parameter 633

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Last sign	String	Set smaller money sign	Should be ¢	?

110. Parameter 634

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Time separator sign	Char.	Set separator for time/min/sec		“ : ”

111. Parameter 635

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Date separator sign	Char.	Set separator for year/month/date		“ - ”



112. Parameter 636

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Price output format	Numeric	Set to print money currency (display/ticket, not on label) 0 : "100.00" type 1 : "\$ 100.00" type 2 : "100.00 \$" type 3 : "\$ 100.00 c" type 4 : "\$100.00c(Greek)" type	For type 3 useage Parameter 633 (last sign)must set before this setting	1

113. Parameter 637

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Price output format (LABEL)	Numeric	Set to print money currency on label (Label print only for total price) 0 : "100.00" type 1 : "\$100.00" type 2 : "100.00\$" type 3 : "\$100.00c" type 4 : "\$100.00c(Greek)" type * default : 0	For 3,4 type usage Parameter 633 last sign must set before For 4 type only display money is below decimal point (EX:"56c")	1

114. Parameter 638

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Set Dual Currency	Numeric	0: No use 1 : Use Use currency table 1 as dual currency (Use when 2types of currency is used)	Changed from "N"	0

115. Parameter 639

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Print [REPACK] on Repack	Y/N	Print [REPACK] on Repack Field		Y

116. Parameter 640 ~ 677 are LABEL CAPTION FIELDS

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT	
640 > Total Price	String			TOTAL PRICE %C	
641 > By Weight Price				PRICE %C/%U	
642 > Non Weight Price				PRICE %C	
643 > By Count Price				PRICE %C/pcs	
644 > Weight				WT %W	
645 > Quantity				QUANTITY	
646 > Tare				TARE %W	
647 > Saved Price				YOU SAVE	
648 > Regular Price				REG PRICE	
649 > Tax Price				TAX %C	
650 > Packed On Date				PACKED ON	
651 > Sell By Date				SELL BY	
652 > Cook By Date				COOK BY	
653 > Produced Date				PRODUCED	
654 > Packed On Time				PACKED ON	
655 > Sell By Time				SELL BY	
656 > Payment Price				RECEIVE %C	
657 > Change Price				CHANGE %C	
658 > Refer. Net Weight				NET WT %W	
659 > Refer Gross Weight				GROSS WT %W	
660 > Manual Weight				MAN WT %W	
661 > Percent Tare				TARE %%	
662 > Percent Tare Limit				LIMIT %%	
663 > Total Price (Total)				TOTAL PRICE %C	
664 > Total Count (Total)				TRANSACTION	
665 > Total Tax (Total)				TAX %C	
666 > Reference				REFERENCE:	
667 > Born In				BORN IN:	
668 > Bred In				BRED IN:	
669 > Slaughtered In				SL IN:	
670 > Cut In				CUT IN:	
671 > Total Price (RPK)		String			TOTAL (REPACK)

--

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
672 > Void Count (Total)				VOID COUNT
673 > Void Price (Total)				VOID PRICE
674 > Total Weight (Total)				TOTAL WT %W
675 > Total Quantity (Total)				TOTAL QTY
676 > Ingredient				INGREDIENT
677 > PLU No.				PLU # :
678 > Origin				ORIGIN :

117. Parameter 679

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Auto Clear Price:	Y/N			Y

118. Parameter 680 ~ 689 are UNDEFINED PARAMETERS (680 is No Caption)

119. Parameter 690

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Prt Under Min Weight on Prepack	Y/N			N

120. Parameter 691 ~ 699 are UNDEFINED PARAMETERS

121. Parameter 700

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Total Displaying Time (sec)	Numeric	????		1

122. Parameter 701

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Prt Tax(Report)	Y/N	Set to print Tax report on scale or clerk report		Y

123. Parameter 702

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Prt Pay(Report)	Y/N	Set to print Pay report on scale or clerk		Y

--

**124. Parameter 703**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Prt Round Summary (Report)	Y/N	Set to print Round report on scale or clerk		N

**125. Parameter 704**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Prt Store Name (Report):	Y/N	Set to print store name on report		N

**126. Parameter 705 ~ 707 are NO CAPTION**

**127. Parameter 708**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Clerk Key Action in Label Mode	?	?????		0

**128. Parameter 709 – 710 are UNDEFINED PARAMETERS**

**129. Parameter 711**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Prt Repack(Report)	Y/N	Set to print Repack report on scale or clerk		Y

**130. Parameter 712**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Prt Prepack(Report)	Y/N	Set to print Prepack report on scale or clerk		Y

**131. Parameter 713**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Prt Negative (Report)	Y/N	Set to print Negative report		Y

**132. Parameter 714**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Prt No Sale Open (Report)	Y/N	Set to print No sale open count		Y

--

**133. Parameter 715**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
PLU Report Type	Numeric			0

**134. Parameter 716**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Send Sale Date Type	Y/N			N

**135. Parameter 717 ~ 719 are UNDEFINED PARAMETERS**

**136. Parameter 720**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Prt Zero Value Report	Y/N			Y

**137. Parameter 721**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Report Type	Numeric			0

**138. Parameter 722**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Clear Clerk Trans. in Z-Report	Y/N			N

**139. Parameter 723**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Send Real Time U.P. Change	Numeric			0

**140. Parameter 724**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use Total Discount	Y/N			N

**141. Parameter 725**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Label Change Mode	Y/N			N

--

142. Parameter 726

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
QR Barcode Add Total	Y/N		Y = All Items in QR code N = Single Item in QR code	N

143. Parameter 727 ~ 729 are UNDEFINED PARAMETERS

144. Parameter 730

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Ethernet TCP/IP	Y/N			Y

145. Parameter 731

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Wireless Bridge	Y/N	Now says "Use Wireless LAN"		N

146. Parameter 732

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use Small Font for PLU Name	Y/N			N

147. Parameter 733

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Label-Ticket Key Mode1	?	?????		2

148. Parameter 734 ~ 741 are UNDEFINED PARAMETERS

149. Parameter 742

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Input Key Time Offset (ms)	?	??????		0

150. Parameter 743

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Long Key Time Offset (ms)	?	??????		3

--

**151. Parameter 744**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Speed Key Number Shown	?	Self Service Model Only		1

**152. Parameter 745**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Speed Key Items Shown	?	Self Service Model Only		2

**153. Parameter 746**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use Auto Zero Setting	Y/N	??????		N

**154. Parameter 747**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Self Key Type	?	1= 7x4 2= 8x5 3= 9x6 4= 6x3	Self Service Model Only	2

**155. Parameter 748**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Start Category Page	Numeric	Return to Category Page Number		100

**156. Parameter 749**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
After Sales Back to Home Page	Y/N	After transaction complete return to Category Home page		Y

**157. Parameter 750**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Out of Paper Threshold (Label)	Numeric			255

--

**158. Parameter 751**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Send Key Value	Y/N	????		N

**159. Parameter 752**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Don't Display Images on Operator's Screen	Y/N	????		N

**160. Parameter 753**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Touch Sensitivity Setting	Numeric	??????		12

**161. Parameter 754**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use OZ in Fixed Weight Unit	Y/N			N

**162. Parameter 755**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Print to File	Y/N	Prints Label to File (debug)		N

**163. Parameter 756**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Enable Debug Log	Y/N	Keeps action record for debugging issues		N

**164. Parameter 757 ~ 770 are UNDEFINED PARAMETERS**

**165. Parameter 771**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Enable Clerk	Y/N	Enable Clerk Function & Menu		N



166. Parameter 772

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Enable Discount	Y/N	Enable Discount Function & Menu		Y

167. Parameter 773

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Enable TAX Table	Y/N	Enable Tax Function & Menu		N

168. Parameter 774

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Enable Origin	Y/N	Enable Origin Function & Menu		Y

169. Parameter 775

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Enable Tare Table	Y/N	Enable Tare Table Function & Menu		N

170. Parameter 776

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Enable Nutri-Facts	Y/N	Enable Nutri-Facts Function & Menu		Y

171. Parameter 777

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Enable Traceability	Y/N	Enable Traceability Function & Menu		Y

172. Parameter 778

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Enable Customer	Y/N	Enable Customer Function & Menu		N

173. Parameter 779

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Enable Currency	Y/N	Enable Currency Function & Menu		N

174. Parameter 780

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Enable Department	Y/N	Enable Department		Y

--

**175. Parameter 781**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Enable Group	Y/N	Enable Group		Y

**176. Parameter 782 is No Caption Parameter 783 ~ 795 are UNDEFINED PARAMETERS**

**177. Parameter 796**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use Tare Auto Zero	Y/N			N

**178. Parameter 797**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Use Full Tare	Y/N	Press Enter will reboot the scale		N

**179. Parameter 798**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
Tare Clear Range	Numeric			0

**180. Parameter 799**

MESSAGE	VALUE	CONTENT	REMARK	DEFAULT
A/D Filter Level	Numeric			0